



DNR-F5864


64 CH NETWORK VIDEO RECORDER

KEY FEATURES

- Support Ultra H.265/H.265/H.264 video formats
- 64-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 8TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

VIDEO/AUDIO INPUT	
IP Video Input	64-ch
Two-way Audio Input	1-ch, RCA
NETWORK	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	320Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
VIDEO/AUDIO OUTPUT	
HDMI/VGA Output	HDMI1/VGA:1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
CVBS Output	1-ch, BNC
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
DECODING	
Decoding format	8 SATA interfaces
Live view/ Playback	up to 8TB for each HDD
Capability	1 eSATA interface
HARD DISK	
SATA	1 SATA interface
Capacity	up to 8TB for each disk
SMART	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Facesearch, Behavior search
Statistical Analysis	People counting
DISK ARRAY	
Array Type	RAID 0, 1, 5, 6, 10
EXTERNAL INTERFACE	
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces
Serial Interface	1x RS232, 1x RS485
USB Interface	Front panel: 2 x USB2.0, Rear panel: 1 x USB3.0
Alarm In	16-ch
Alarm Out	4-ch
GENERAL	
Power Supply	100 ~ 240VAC Power Consumption: 20 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity 90% RH(non-condensing)
Dimensions(W×D×H)	442mm ×425mm×86mm (17.4" × 16.7" × 3.4")
Weight (without HDD)	5.13 Kg (11.31 lb)

DIMENSIONS

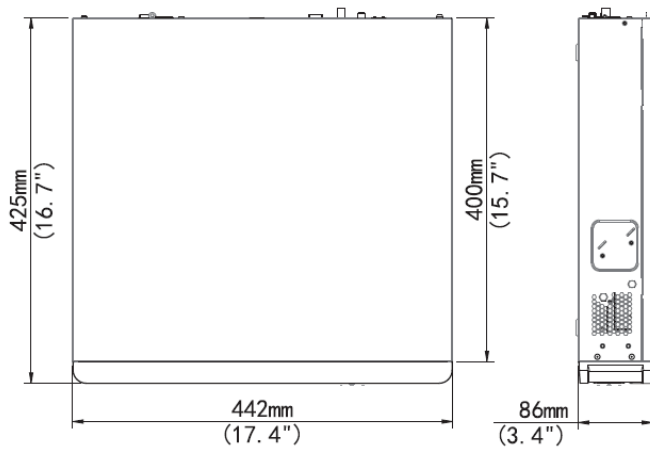

REAR PANEL

